


Suction & Discharge Hose

- **PVC Reinforced Suction Hose with One Male & Female NPSH Connection; 1" to 6" Sizes**
- **PVC Flexible Discharge Hose with One Male & Female NPSH Connection; 1" to 6" Sizes**
- **1" & 2-1/2" Single Jacket Polyester Industrial High Pressure Fire Hose**
- **2" & 3" High Pressure or General Purpose Hose Kits**



PVC Reinforced Suction Hose

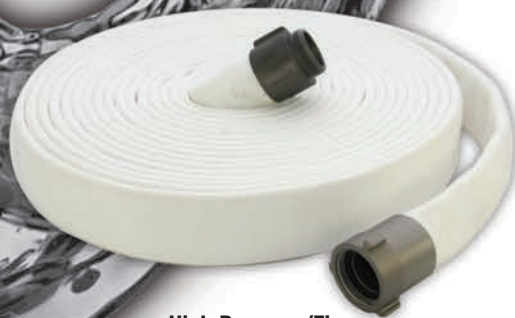

High Pressure/Fire Discharge Hose



Hose Kit



PVC Flexible Discharge Hose



400 Spring Street • Royersford, PA 19468 USA

www.amtpump.com • 888-amt-pump (268-7867)

For use with nonflammable liquids compatible with pump component materials. Viton® and Teflon® are registered trademarks of E. I. DuPont.

ACC-1

Tel: 866-777-6060
Fax: 866-777-6383

Springer Pumps, LLC

Website: www.springerpumps.com
Int'l: +001 267 404 2910



Suction & Discharge Hose

A Gorman-Rupp Company

HOSE SUCTION

Part No.	PVC Reinforced Water Suction Hose	Ship Wt. (Lbs.)
C222-90	1" x 15' PVC Water Suction Hose Assembly	8
C220-90	1-1/2" x 20' PVC Water Suction Hose Assembly	10
C221-90	2" x 20' PVC Water Suction Hose Assembly	17
C355-90	2-1/2" x 20' PVC Water Suction Hose Assembly	24
C356-90	3" x 20' PVC Water Suction Hose Assembly	28
C357-90	4" x 20' PVC Water Suction Hose Assembly	38
C354-90	6" x 20' PVC Water Suction Hose Assembly	75

Water suction hose designed for construction, mining, marine and irrigation purposes. Construction: green, flexible, abrasion-resistant PVC with a rigid PVC reinforcement for full vacuum. Smooth Bore.

HOSE DISCHARGE

PVC Water Discharge Hose Assembly Size	Part No. (25 Ft Length)	Ship Wt. (Lbs.)	Part No. (50 Ft. Length)	Ship Wt. (Lbs.)
1-1/2"	C216-90	6	C372-90	11
2"	C217-90	8	C373-90	19
3"	C358-90	11	C374-90	22
4"	C359-90	17	C375-90	32
6"	C353-90	25	C376-90	54

Designed for water discharge services. Durable, lightweight discharge hose that rolls up flat for easy storage. Construction: close woven nylon jacket impregnated with polyvinyl chloride. Mildew resistant.

HIGH PRESSURE FIRE HOSE

Polyester Industrial High Pressure/ Fire Hose Assembly Size	Part No. (50 Ft Length)	Ship Wt. (Lbs.)
1"	C331-90	9
1-1/2"	C333-90	11
2"	C335-90	22
2-1/2"	C337-90	25

Designed for high pressure applications such as: fire fighting, fire protection and industrial washdown. Test pressure rating is suitable up to 300 PSI. Construction: Single jacket 100% polyester, ozone resistant tube and black SBR age resistant rubber tube that will not absorb moisture. **Aluminum Male x Female NPSH rocker lug couplings.**

*Fire hose nozzles & adjustable Spanner / Hydrant Wrench also available.

HOSE KITS

Part No.	Hose Kits, Hose and Fittings	Ship Wt. (Lbs.)
55-362	2" General Purpose Hose Kit with 20 ft. 2" suction and 25 ft. 2" discharge hose and hose wrench.	20
55-363	3" General Purpose Hose Kit with 20 ft. 3" suction and 25 ft. 3" lay flat discharge hose and hose wrench.	20
55-338	2" High Pressure Hose Kit with 20 ft. 2" suction and 100 ft. 1-1/2" high pressure (100 PSI) discharge hose, (1) 1-1/2" fire nozzle, 1-1/2" x 2" adapter and hose wrench.	38

All suction and discharge hose supplied with Male x Female NPSH couplings.

Female NPSH is compatible with Male NPT connection.

**Temperature Range:
10°F to 150°F**



A Gorman-Rupp Company

Manufacturer of AMT & IPT Pumps

400 Spring Street • Royersford, PA 19468 USA

www.amtpump.com • 888-amt-pump (268-7867)

The Gorman-Rupp Company reserves the right to discontinue any model or change specifications at any time without incurring any obligation. ©2012 American Machine and Tool Company. All rights reserved.



GORMAN-RUPP®

1212

ACC-2

Tel: 866-777-6060
Fax: 866-777-6383

Springer Pumps, LLC

Website: www.springerpumps.com
Int'l: +001 267 404 2910