



# 1" Self-Priming Stainless Steel Centrifugal Pumps

Model 429A-98

- **300 Series Investment Cast Stainless Steel Construction**
- **Viton® Mechanical Seal and O-Ring**
- **Handles Liquids and Chemicals with Specific Gravities up to 1.6**
- **1" NPT Suction and Discharge Ports**
- **Maximum Temperature 200° F**
- **Maximum Flow 66 GPM**
- **Maximum Head 68 Ft.**
- **Self-priming to 6 Ft.**
- **Self-Cleaning, Semi-Open Impeller**
- **1/3 to 2 HP Single or Three Phase Motors**



AMT 300 Series Investment Cast Stainless Steel Transfer pumps are designed to handle liquids and chemicals with specific gravities to 1.6. The pumps are particularly well suited to applications involving perchloroethylene (PCE) and are recommended for use with non-flammable liquids.

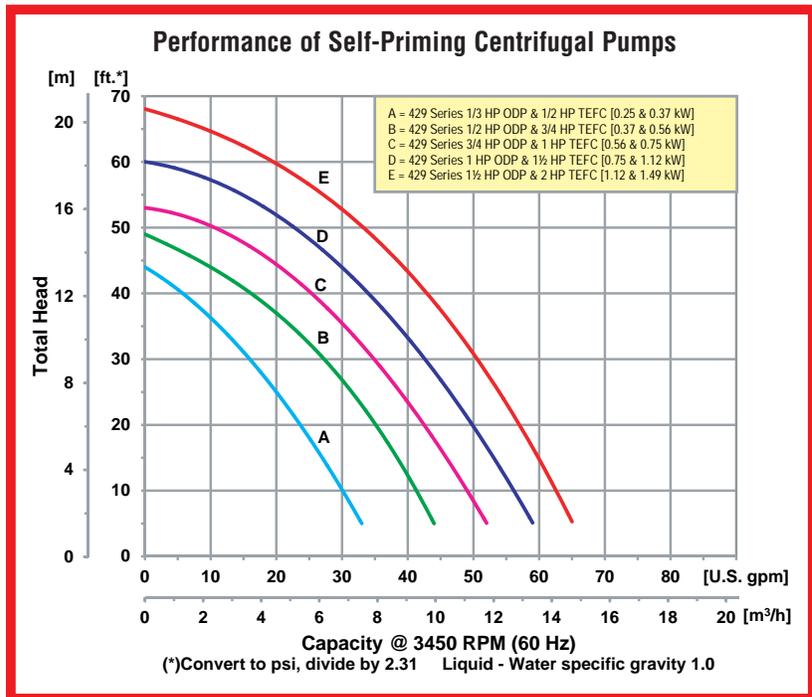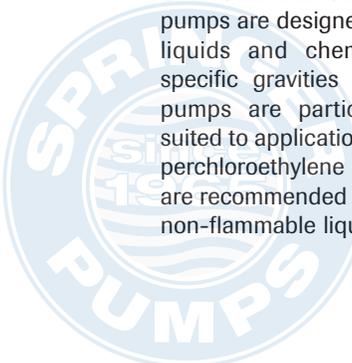

400 Spring Street • Royersford, PA 19468 USA

[www.amtpump.com](http://www.amtpump.com) • 888-amt-pump (268-7867)

For use with nonflammable liquids compatible with pump component materials. Viton® and Teflon® are registered trademarks of E. I. DuPont.

SPE-3

Tel: 866-777-6060  
 Fax: 866-777-6383

Springer Pumps, LLC

Website: [www.springerpumps.com](http://www.springerpumps.com)  
 Int'l: +001 267 404 2910

## Pump Dimensional & Specification Data

Model	Curve	HP	PH	ENC	Voltage @ 60 Hz +	Full Load Amps	SUC*	DIS*	L**	W**	H	Ship Wt. (Lbs.)
4294-98	A	1/3	1	ODP	115/230	8/4	1	1	14.8 [37.6]	6.8 [17.3]	8.8 [22.3]	34
429A-98		1/2	1	TEFC	115/230	9/5			15.3 [38.8]	8.8 [22.3]	8.8 [22.3]	41
4295-98	B	1/2	1	ODP	115/230	10/5	1	1	15.0 [38.1]	6.8 [17.3]	8.8 [22.3]	38
429B-98		3/4	1	TEFC	115/230	9/5			15.8 [40.1]	8.8 [22.3]	8.8 [22.3]	43
429K-98		3/4	3	TEFC	230/460	3/2			15.3 [38.8]	8.8 [22.3]	8.8 [22.3]	40
4296-98	C	3/4	1	ODP	115/230	13/7	1	1	15.6 [39.6]	6.8 [17.3]	8.8 [22.3]	39
429C-98		1	1	TEFC	115/230	12/6			16.0 [40.6]	8.8 [22.3]	8.8 [22.3]	46
429L-98		1	3	TEFC	230/460	4/2			14.6 [37.1]	8.8 [22.3]	8.8 [22.3]	43
4297-98	D	1	1	ODP	115/230	17/9	1	1	15.8 [40.1]	6.8 [17.3]	8.8 [22.3]	42
429D-98		1½	1	TEFC	115/230	18/9			16.5 [41.9]	8.8 [22.3]	8.8 [22.3]	54
429M-98		1½	3	TEFC	230/460	5/3			16.3 [41.4]	8.8 [22.3]	8.8 [22.3]	51
4298-98	E	1½	1	ODP	115/230	22/11	1	1	16.3 [41.4]	6.8 [17.3]	8.8 [22.3]	45
429E-98		2	1	TEFC	115/230	22/11			17.3 [43.9]	8.8 [22.3]	8.8 [22.3]	65
429N-98		2	3	TEFC	230/460	6/3			16.8 [42.7]	8.8 [22.3]	8.8 [22.3]	62


(\*) Standard NPT (Female) pipe thread.

(\*\*) This dimension may vary due to motor manufacturer's specifications.

(+) 3-Phase models can also operate on 50 Hz (This will change full load amps and service factor, RPM and priming capabilities).

NOTE: Dimensions are in inches (centimeters) and have a tolerance of  $\pm 1/4"$ .

NOTE: Electric supply for ALL motors must be within  $\pm 10\%$  of nameplate voltage rating (e.g. 230V  $\pm 10\%$  = 207 to 253).

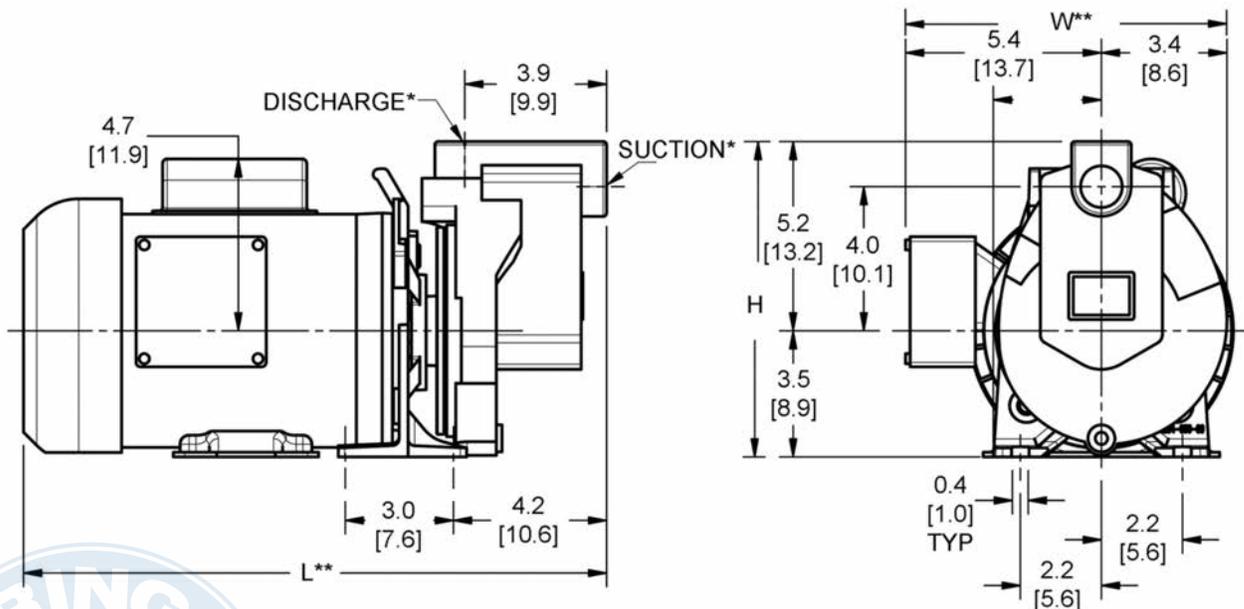

## Standard Features

- 300 Series Investment Cast Stainless Steel Construction
- Viton® Mechanical Seal and O-ring
- 1" NPT Suction and Discharge Ports
- ODP or TEFC Single and Three Phase Motors
- Maximum Working Pressure 75 PSI
- Maximum Temperature 200° F
- Self-cleaning, Semi-open Impeller
- QSP – Quick Ship Pump for Many Models

**Hazardous Duty/Explosion Proof motors available from stock ranging from 1 to 10 HP; CALL FOR QUOTATION & LEAD TIME!**



A Gorman-Rupp Company

**Manufacturer of AMT & IPT Pumps**

400 Spring Street • Royersford, PA 19468 USA

[www.amtpump.com](http://www.amtpump.com) • 888-amt-pump (268-7867)

The Gorman-Rupp Company reserves the right to discontinue any model or change specifications at any time without incurring any obligation. ©2012 American Machine and Tool Company. All rights reserved.



GORMAN-RUPP®

1212

SPE-4

Tel: 866-777-6060  
Fax: 866-777-6383

Springer Pumps, LLC

Website: [www.springerpumps.com](http://www.springerpumps.com)  
Int'l: +001 267 404 2910